

Garlock® Style 8420™ Split Expansion Joint


Easy installation and removal reduce downtime with new split expansion joint

- Split design eliminates equipment disassembly, reducing costly downtime
- Available in EPDM, nitrile* and fluoroelastomer in sizes from 2" to 24"
- Can be customized for your application; contact Garlock with your specifications
- Adhesive kits with comprehensive installation instructions are provided with every shipment to facilitate quick assembly

Ideal for

- All types of vacuum pumps
- Non-flanged piping
- Small, irregular openings
- Low-pressure and vacuum applications

* EPDM and nitrile are standard—
other elastomers available on request.

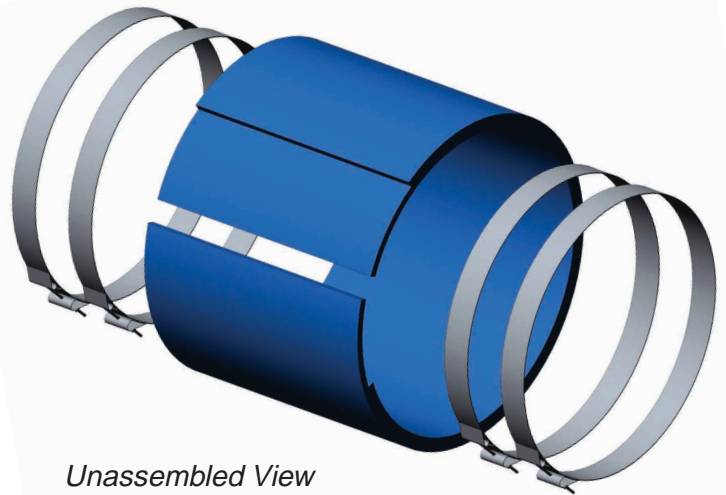

Unassembled View

Specifications

	2" Max. Pipe Gap Opening	4" Max. Pipe Gap Opening	6" Max. Pipe Gap Opening
Clamps Required:	4	4	4
Thickness:			
2"-12" Size (50.8 mm-304.8 mm)	1/4" (6.4 mm)	1/4" (6.4 mm)	1/4" (6.4 mm)
14"-24" Size (355.6 mm-609.6 mm)	3/8" (9.5 mm)	3/8" (9.5 mm)	3/8" (9.5 mm)
Pressure, Max.:	15 psi (1.034 bar)	5 psi (0.345 bar)	5 psi (0.345 bar)
Vacuum:	14" Hg (356 mm Hg)	5" Hg (127 mm Hg)	5" Hg (127 mm Hg)
Temperature, Max.:	400°F (204°C)	400°F (204°C)	400°F (204°C)
Movement:	Vibration Only	Vibration Only	Vibration Only
Lateral Misalignment, Max.:	1/2" (12.7 mm)	1/2" (12.7 mm)	1/2" (12.7 mm)
Width of Joint:	8" (203.2 mm)	8" (203.2 mm)	10" (254 mm)



Notes:

1. All applications above 165°F (74°C) require Viton* adhesive kits.
2. T-bolt clamps recommended on all applications; not included with adhesive kits.

* Viton is a registered trademark of DuPont Dow Elastomers.

AUTHORIZED DISTRIBUTOR



ISO 9001:2000
Cert. #001762

WARNING:

Properties/applications shown throughout this brochure are typical. Your specific application should not be undertaken without independent study and evaluation for suitability. For specific application recommendations consult Garlock. Failure to select the proper sealing products could result in property damage and/or serious personal injury.

Performance data published in this brochure has been developed from field testing, customer field reports and/or in-house testing.

While the utmost care has been used in compiling this brochure, we assume no responsibility for errors. Specifications subject to change without notice. This edition cancels all previous issues. Subject to change without notice.

GARLOCK is a registered trademark for packings, seals, gaskets, and other products of Garlock.

© Garlock Inc 2004. All rights reserved worldwide.



Garlock Sealing Technologies
1666 Division Street
Palmyra, New York 14522 USA
1-315-597-4811
1-800-448-6688
Fax: 1-800-543-0598
1-315-597-3216

Garlock Sealing Technologies® is an EnPro Industries company.

PRINTED IN U.S.A.

Other Garlock facilities are located in:

Columbia, SC, USA
Phone 1-803-783-1880
Fax 1-803-783-4279

São Paulo, Brazil
Phone 55-11-4352-6161
Fax 55-11-4352-8181

W. Yorkshire, England
Phone 44-1422-313600
Fax 44-1422-313601

Mexico City, Mexico
Phone 52-555-567-7011
Fax 52-555-368-0418

Houston, TX, USA
Phone 1-281-459-7200
Fax 1-281-458-0502

Brantford, Canada
Phone 1-519-753-8671
Fax 1-519-758-2265

Saint-Étienne, France
Phone 33-4-7743-5100
Fax 33-4-7743-5151

Singapore
Phone 65-6285-9322
Fax 65-6284-5843

Sydney, Australia
Phone 61-2-9793-2511
Fax 61-2-9793-2544

Sherbrooke, Canada
Phone 1-819-563-8080
Fax 1-819-563-5620

Neuss, Germany
Phone 49-2131-3490
Fax 49-2131-349-222

Dubai, UAE
Phone 971-4-8833652
Fax 971-4-8833682