


# Thomson MULTIPAC™ 6101

Aramid Fibers / Nitrile Binder

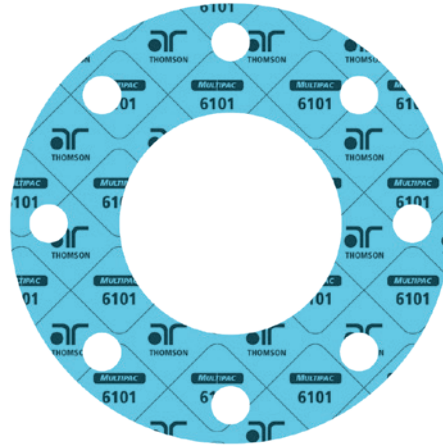

## FEATURES / BENEFITS

- Premium General Service sheet material
- Good tensile strength and flexibility resulting in robust gasket with improved handleability.
- Improved formulation for superior sealability.
- Excellent versatility.
- Passes Fire Safe test DVGW VP-401. See Specifications for other certifications and approvals.

## TYPICAL APPLICATIONS

- Marine, Shipbuilding, Mining, Wastewater, Pulp and Paper, and Petroleum industries.
- Water, saturated steam, aliphatic hydrocarbons, oils, gasoline and inert gases.

## “M & Y” FACTORS

Thickness		“m”	“y”
in	mm	(no units)	psi
1/16	1.6	1.2	2900
1/8	3.2	1.5	4200

## SPECIFICATIONS

**Construction:** Aramid Fibers / Nitrile Binder

**Temperatures:**

Minimum: -100°F (-75°C)

Intermittent: +700°F (+370°C)

Continuous: +500°F (+260°C)

**Tensile Strength:** 2030 psi

**Pressure, max:** 1450 psi (100 bar)

**Color:** Blue with Black branding.

**Certifications:**

DVGW VP-401 Fire safe

DVGW 3535-6 Compliant for gas supply

Approved for TA-Luft

See reverse for technical data.

## TECHNICAL DATA - MULTIPAC™ 6101

Physical Properties <sup>1</sup>			
TEST METHOD	TYPICAL PHYSICAL PROPERTIES		
ASTM F36	<b>Compressibility:</b> average, %	11	
ASTM F36	<b>Recovery:</b> %	60	
DIN 28090-2	<b>Creep relaxation:</b> at room temp, %	4.7	
	at elevated temp, %	0.8	
ASTM F152	<b>Tensile across grain:</b> psi (MPa)	2030 (14)	
ASTM F433	<b>Density:</b> lbs/ft <sup>3</sup> (grams/cm <sup>3</sup> )	106 (1.7)	
ASTM F586	<b>Design factors:</b>	<b>1/16"</b>	<b>1/8"</b>
	"m" factor	1.2	1.5
	"y" factor, psi	2900	4200
Immersion Properties* - ASTM F146 Fluid Resistance After Five Hours			
	ASTM #1 OIL 300°F (150°C)	ASTM IRM #903 300°F (150°C)	ASTM FUEL B 70–85°F (20–30°C)
<b>Thickness increase:</b> %	0–5	2	5
<b>Weight increase:</b> %	0–10	-	20 max
<b>Tensile loss:</b> %	-	0–35	-
Sealing Characteristics			
	DIN 3535-6 NITROGEN		
<b>Leakage:</b> ml/min	.05		

## NOTES

This is a general guide and should not be the sole means of selecting or rejecting this material. Based on ANSI RF flanges at our preferred torque - when approaching maximum pressure, continuous operating temperature, minimum temperature or 50% of maximum P x T, consult A.R. Thomson Group. Minimum temperature rating is conservative.

\*Values do not constitute specification limits.

<sup>1</sup> All data is based on material thickness of 2mm. For data on other sizes, please consult A.R. Thomson Group.

## AUTHORIZED DISTRIBUTOR

**Limitation of liability:** actual performance may vary and is determined by factors unique to a given application. It is recommended that care be taken in the selection and application of materials for hazardous services and controlled testing be undertaken to determine suitability for a specific application. A.R. Thomson Group does not make or imply any warranty of suitability for a particular purpose and is not liable for any damages arising from the use of the information in this sheet.



Locations across Canada to serve you. For your nearest branch, please visit [www.arthomson.com](http://www.arthomson.com)

Copyright © A.R. Thomson Group - All rights reserved. v1.6