
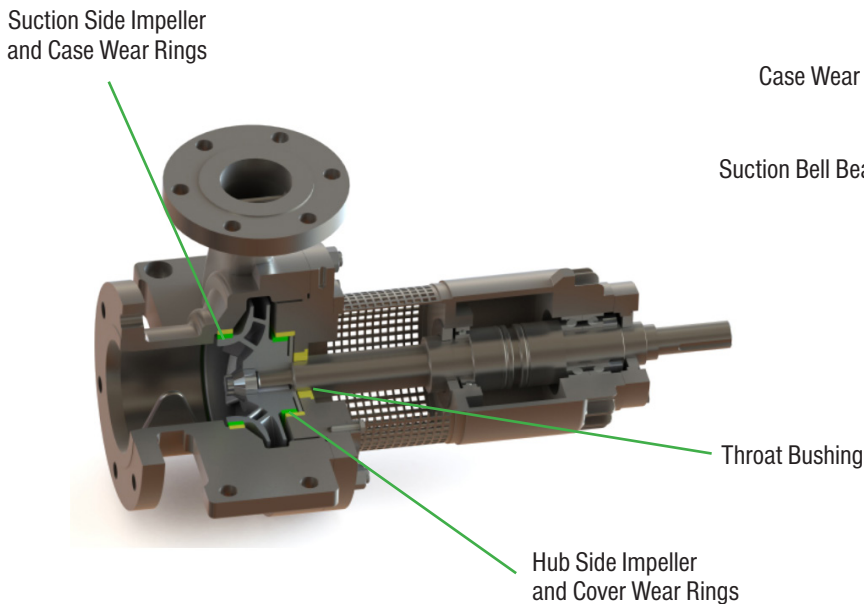
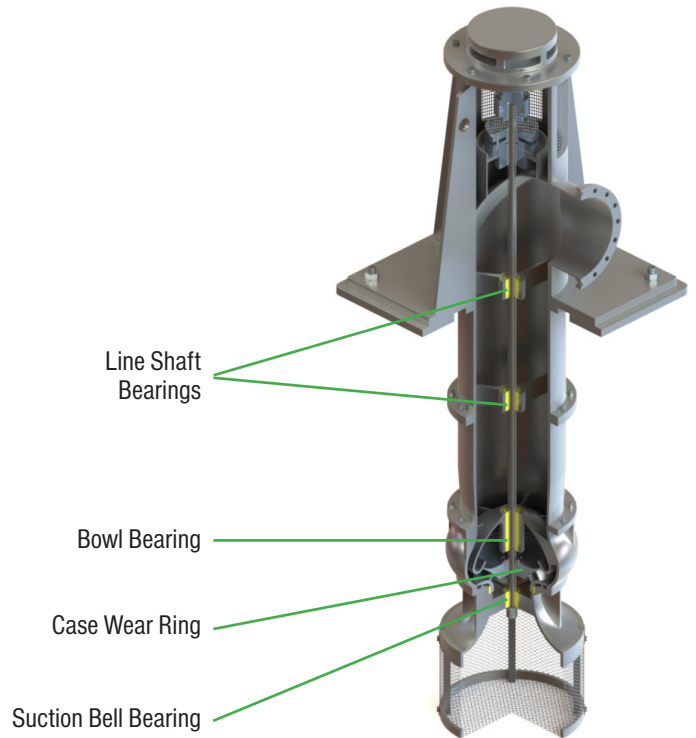


WR=Wear Resistance	 WR [®] 300	Material	Chopped carbon fiber-filled PEEK
		Temperature	Subzero/+275°F (135°C)
		Application	General wear resistance
WR=Wear Resistance	 WR [®] 525	Material	Continuous carbon fiber-filled PEEK
		Temperature	Subzero/+525°F (274°C)
		Application	High-pressure/high-temperature Stationary and rotating applications
WR=Wear Resistance	 WR [®] 650	Material	Carbon fiber-filled PFA
		Temperature	Subzero/+500°F (260°C)
		Application	Extended dry run capability Almost universal chemical compatibility
AR=Abrasion Resistance	 AR [®] 1	Material	Filled PTFE
		Temperature	Subzero/+120°F (49°C)
		Application	General abrasive resistance
AR=Abrasion Resistance	 AR [®] HT	Material	Filled PEEK
		Temperature	Subzero/+250°F (121°C)
		Application	Higher temperature abrasive resistance

Not for design guidelines. Reference only.

Energy Composites: Where Our Products Are Used

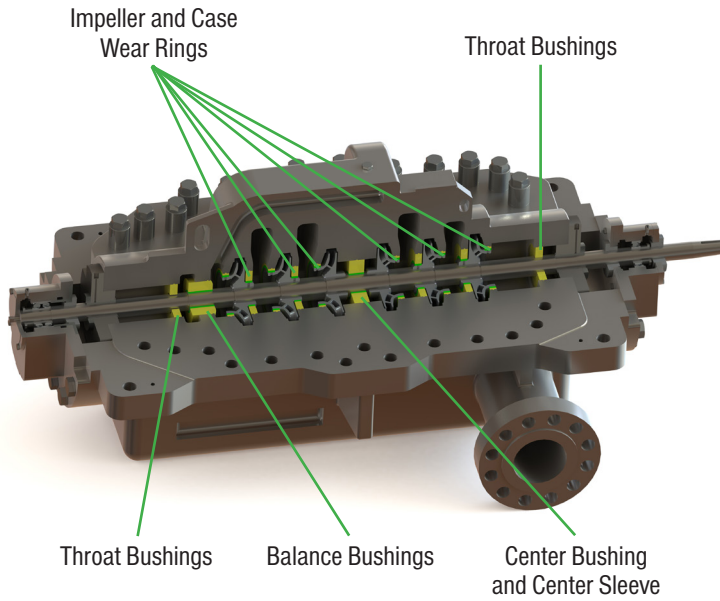

This information is proprietary and confidential to Greene Tweed. Redistribution is forbidden without consent from Greene Tweed.

Statements and recommendations in this publication are based on our experience and knowledge of typical applications of this product and shall not constitute a guarantee of performance nor modify or alter our standard warranty applicable to such products.

© 2017, Greene Tweed all rights reserved. All trademarks are property of their respective owners.
04/18-GT GH-US-EG-001