


Thomson MULTIPAC™ 6400

Aramid Fibers / SBR Binder

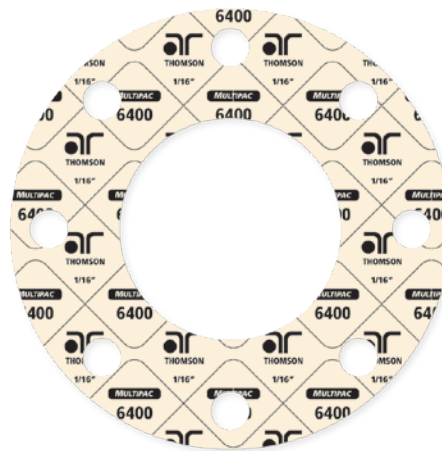

FEATURES/BENEFITS

- High quality material with excellent sealability.
- Suitable for inert gases.
- Ideal for colour-sensitive applications or where a white gasket is preferred.
- Very good mechanical properties making it easy to cut.
- Very good Anti-stick properties.

TYPICAL APPLICATIONS

- General service 'white' sheet material for Inert Gases, Food and Beverage, Saturated Steam, Water, Alcohols, Dilute Acids, and applications where a white gasket is preferred.

"M & Y" FACTORS

Thickness		"m"	"y"
in	mm	(no units)	psi
1/16	1.6	2.7	2359
1/8	3.2	4.2	2931

SPECIFICATIONS

Construction: Aramid Fibers / SBR Binder

Temperature:

Minimum: -100°F (-75°C)

Intermittent: +700°F (+370°C)

Continuous: +400°F (+205°C)

Tensile Strength: 1800 psi

Pressure, max: 1500 psi (103 bar)

Color: Off-White with Black branding

See reverse for more technical data.

TECHNICAL DATA - MULTIPAC™ 6400

Physical Properties ¹		
TEST METHOD	TYPICAL PHYSICAL PROPERTIES	
ASTM F36	Compressibility: range, %	8–16
ASTM F36	Recovery: %	45
DIN 28090-2	Creep relaxation: %	20
ASTM F152	Tensile across grain: psi	1800
ASTM F433	Density: lbs/ft ³	106
ASTM F586	Design factors:	1/16" 1/8"
	"m" factor	2.7 4.2
	"y" factor, psi (N/mm ²)	2359 (16.3) 2931 (20.2)
Immersion Properties* - ASTM F146 Fluid Resistance After Five Hours		
	ASTM IRM #903 300°F (150°C)	ASTM FUEL B 70–85°F (20–30°C)
Thickness increase: %	30	5–10
Weight increase: %	30	30 max
Sealing Characteristics		
	ASTM 2378 NITROGEN	
Leakage: mil/min	.03	

NOTES

This is a general guide and should not be the sole means of selecting or rejecting this material. Based on ANSI RF flanges at our preferred torque - when approaching maximum pressure, continuous operating temperature, minimum temperature or 50% of maximum P_xT, consult A.R. Thomson Group. Minimum temperature rating is conservative.

*Values do not constitute specification limits.

¹ All data is based on material thickness of 2mm. For data on other sizes, please consult A.R. Thomson Group.

AUTHORIZED DISTRIBUTOR

Limitation of liability: actual performance may vary and is determined by factors unique to a given application. It is recommended that care be taken in the selection and application of materials for hazardous services and controlled testing be undertaken to determine suitability for a specific application. A.R. Thomson Group does not make or imply any warranty of suitability for a particular purpose and is not liable for any damages arising from the use of the information in this sheet.



Locations across Canada to serve you. For your nearest branch, please visit www.arthomson.com

Copyright © A.R. Thomson Group - All rights reserved. v1.2