


Thomson TUFLON® 7200

Silica filled PTFE

TUFLON® 7200 is a silica filled PTFE gasketing material with excellent chemical resistance and reduced cold flow. It has an unlimited shelf life, and easy to cut, handle, and remove from the flange face. It is an economical alternative to other filled PTFE products in the marketplace and is typically used for sulfuric acid applications.

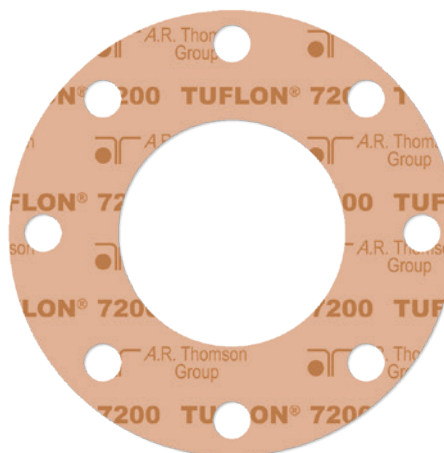

FEATURES / BENEFITS

- Improved performance over conventional Teflon.
- Reduced cold flow and creep relaxation.
- Cuts operational costs through reduced inventory, waste, maintenance and energy consumption.

TYPICAL APPLICATIONS

- Mining (sulfuric acid leaching process and PAL - pressure acid leaching).
- Strong acids (except hydrofluoric acid).
- Cryogenics, hydrocarbons, water, and saturated steam (less than 100 psi (7 bar), 338°F (170°C)).

“M & Y” FACTORS

“m”	“y”	
(no units)	psi	MPa
1.4	2320	16.0

SPECIFICATIONS

Construction: PTFE / Silica

Temperature range:
-364°F to +500°F (-220°C to +260°C)

Pressure, max: 800 psi (55 bar)

PxT, max: $P \times T = \text{sig} \times \text{°F} \text{ (bar} \times \text{°C)}$
 1/32" (0.8 mm) 1/16" (1.6 mm) 350,000 (12,000)
 1/8" (3.2 mm) 250,000 (8,600)

Dimensions:
Available in 60" x 60" sheet size.
1/16" and 1/8" thickness.

See reverse for additional technical data.

Note: Specifications based on ANSI RF flanges at our preferred torque. When approaching maximum pressure, minimum/continuous operating temperatures, or 50% of maximum PxT, consult A.R. Thomson Group.

TECHNICAL DATA - TUFLON® 7200

Physical Properties		
TEST METHOD	TYPICAL PHYSICAL PROPERTIES	
ASTM F36	Compressibility: range, %	7–12
ASTM F36	Recovery: %	> 40
ASTM F38	Creep relaxation: %	18
ASTM F152	Tensile across grain: psi (N/mm ²)	2000 (14)
Sealing Characteristics*		
	ASTM F37B - FUEL A	
Gasket load: psi (N/mm ²)	1000 (7)	
Internal pressure: psig (bar)	9.8 (0.7)	
Leakage: ml/hr	0.22	

NOTES

This is a general guide and should not be the sole means of selecting or rejecting this material. ASTM test results in accordance with ASTM F-104; properties based on 1/32" (0.8 mm) sheet thickness unless otherwise mentioned. Based on ANSI RF flanges at our preferred torque. When approaching maximum pressure, continuous operating temperature, minimum temperature, or 50% of maximum P_{xT}, consult A.R. Thomson Group.

*Values do not constitute specification limits.

AUTHORIZED DISTRIBUTOR

Limitation of liability: actual performance may vary and is determined by factors unique to a given application. It is recommended that care be taken in the selection and application of materials for hazardous services and controlled testing be undertaken to determine suitability for a specific application. A.R. Thomson Group does not make or imply any warranty of suitability for a particular purpose and is not liable for any damages arising from the use of the information in this sheet.



Locations across Canada to serve you. For your nearest branch, please visit www.arthomson.com

Copyright © A.R. Thomson Group - All rights reserved. v2.1