


Thomson ULTRAPAC™ 8600

Graphite /Aramid /Nitrile

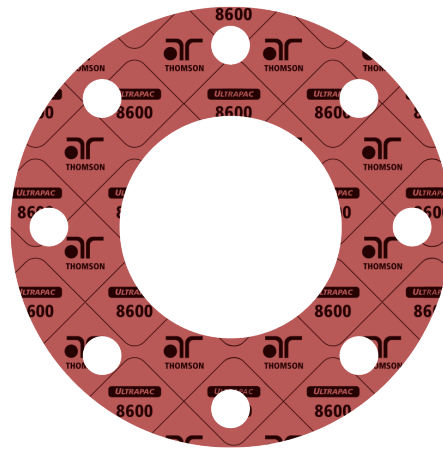

FEATURES / BENEFITS

- Excellent general service sheet.
- Outstanding mechanical properties and handleability.
- Very flexible sheet for cutting narrow cross sections or non-standard shapes and sizes.
- Increased temperature capability due to lower binder content.
- Superior chemical compatibility.
- Environmentally friendly: produced using a water-based process and is nitrosamine and solvent-free.

TYPICAL APPLICATIONS

- High Performance general service sheet material for fabrication of gaskets in moderate service conditions in Pulp and Paper, Petroleum, Wastewater, Mining and Shipbuilding industries.
- Saturated Steam, hot water, hydrocarbons, oils and gasoline.

“M & Y” FACTORS

Thickness		“m”	“y”
in	mm	(no units)	psi
1/16	1.6	3	6237
1/8	3.2	3	7977

SPECIFICATIONS

Construction: Graphite /Aramid /Nitrile

Temperatures:

Minimum: -100°F (-75°C)

Intermittent: +825°F (+440°C)

Continuous: +600°F (+315°C)

Pressure, max: 1500 psi

P x T, max:

P x T, max psig x °F (bar x °C)

1/32" & 1/16" 450,000 (16,250)

1/8" 322,000 (11,645)

Color: Red with Black branding.

See reverse for technical data.

TECHNICAL DATA - ULTRAPAC™ 8600

Physical Properties		
TEST METHOD	TYPICAL PHYSICAL PROPERTIES	
ASTM F36	Compressibility: average, %	20
ASTM F36	Recovery: %	32
DIN 28090-2	Creep relaxation: %	20
ASTM F152	Tensile across grain: psi	1300
DIN 28090-2	Density: lbs/ft ³ (grams/cm ³)	87.4 (1.4)

Immersion Properties - ASTM F146 Fluid Resistance After Five Hours		
	ASTM IRM #903 300°F (150°C)	ASTM FUEL A 70–85°F (20–30°C)
Thickness increase: %	5	5
Weight increase: %	20	17

Sealing Characteristics	
	DIN 3535-6 NITROGEN
Leakage: mg/(s-m)	0.5

NOTES

This is a general guide and should not be the sole means of selecting or rejecting this material. ASTM test results in accordance with ASTM F-104; properties based on nominal 2mm sheet thickness unless otherwise mentioned. When approaching maximum or minimum temperatures, or maximum operating pressure, consult A.R. Thomson Group.

AUTHORIZED DISTRIBUTOR

Limitation of liability: actual performance may vary and is determined by factors unique to a given application. It is recommended that care be taken in the selection and application of materials for hazardous services and controlled testing be undertaken to determine suitability for a specific application. A.R. Thomson Group does not make or imply any warranty of suitability for a particular purpose and is not liable for any damages arising from the use of the information in this sheet.



Locations across Canada to serve you. For your nearest branch, please visit www.arthomson.com
Copyright © A.R. Thomson Group - All rights reserved. v1.3