


Thomson ULTRAPAC™ 8900-FM

Graphite / Carbon Fiber / Nitrile
316SS Flexmet™ Insert

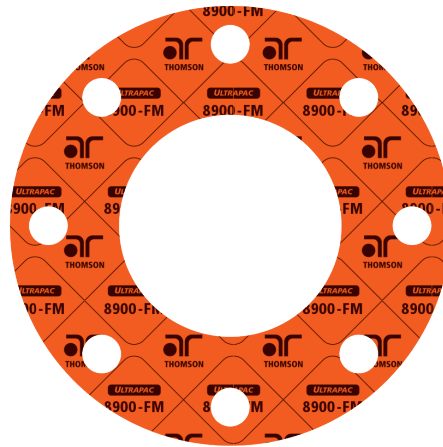

FEATURES / BENEFITS

- Flexmet insert provides blowout resistance and extended pressure capability.
- Fire safe rating: passes API 6FB Fire Safety test.
- Superior sealability.
- Very flexible sheet ideal for cutting narrow cross sections or non-standard shapes and sizes.
- Good chemical compatibility.
- Excellent high temperature/high pressure sheet.
- Environmentally friendly: produced using a water-based process and is nitrosamine and solvent-free.

TYPICAL APPLICATIONS

- General Service sheet with high temperature and pressure capability. Fire Safe.
- Moderate service steam, high pressure conditions, hydrocarbons, oils, hot water and gasoline.
- Pulp and Paper, Oil Refining, Mining/Ore-Processing, Shipbuilding, Power Generation.

“M & Y” FACTORS

Thickness		“m”	“y”
in	mm	(no units)	psi
1/16	1.6	2.2	5308
1/8	3.2	1.9	6773

SPECIFICATIONS

Construction:

Graphite / Carbon Fiber / Nitrile
316 Stainless Steel Flexmet Insert

Temperatures:

Minimum: -100°F (-75°C)
Intermittent: +950°F (+510°C)
Continuous: +660°F (+349°C)

Pressure, max: 2800 psi (193 Bar)

Color: Grey with Black branding.

See reverse for technical data.

CERTIFICATIONS



API 6FB Fire Safe

TECHNICAL DATA - ULTRAPAC™ 8900-FM

Physical Properties

TEST METHOD	TYPICAL PHYSICAL PROPERTIES	
ASTM F36	Compressibility: average, %	35
ASTM F36	Recovery: %	17
DIN 28090-2	Creep relaxation: %	21
ASTM F152	Tensile across grain: psi	1000
DIN 28090-2	Density: lbs/ft ³ (grams/cm ³)	75 (1.2)

Immersion Properties - ASTM F146 Fluid Resistance After Five Hours

	ASTM IRM #903 300°F (150°C)	ASTM FUEL B 68°F (20°C)
Thickness increase: %	2.5	1.6
Weight increase: %	29.2	24

Sealing Characteristics

	DIN 3535-6 NITROGEN
Leakage: mg/(s-m)	.05

NOTES

This is a general guide and should not be the sole means of selecting or rejecting this material. ASTM test results in accordance with ASTM F-104; properties based on nominal 2mm sheet thickness unless otherwise mentioned. When approaching maximum or minimum temperatures, or maximum operating pressure, consult A.R. Thomson Group.

AUTHORIZED DISTRIBUTOR

Limitation of liability: actual performance may vary and is determined by factors unique to a given application. It is recommended that care be taken in the selection and application of materials for hazardous services and controlled testing be undertaken to determine suitability for a specific application. A.R. Thomson Group does not make or imply any warranty of suitability for a particular purpose and is not liable for any damages arising from the use of the information in this sheet.



Locations across Canada to serve you. For your nearest branch, please visit www.arthomson.com
Copyright © A.R. Thomson Group - All rights reserved. v1.3