


Thomson ULTRAPAC™ 8900

Graphite / Carbon Fiber / Nitrile

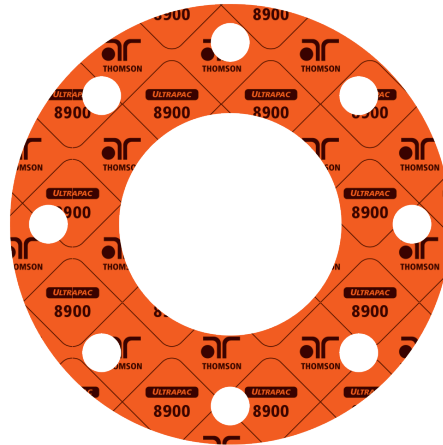

FEATURES / BENEFITS

- Exceptional temperature and pressure capabilities.
- Fire safe rating: passes API 6FB Fire Safe test.
- Superior sealability.
- Very flexible sheet ideal for cutting narrow cross sections or non-standard shapes and sizes.
- Good chemical compatibility.
- Excellent general service and high temperature sheet.
- Environmentally friendly: produced using a water-based process and is nitrosamine and solvent-free.

TYPICAL APPLICATIONS

- General Service sheet with high temperature capability and Fire Safe rating.
- Moderate service steam, high pressure conditions, hydrocarbons, oils, hot water and gasoline.
- Pulp and Paper, Oil Refining, Mining/Ore-Processing, Shipbuilding, Power Generation.

“M & Y” FACTORS

Thickness		“m”	“y”
in	mm	(no units)	psi
1/16	1.6	2	5946
1/8	3.2	2	7252

SPECIFICATIONS

Construction:

Graphite / Carbon Fiber / Nitrile

Temperatures:

Minimum: -100°F (-75°C)

Intermittent: +950°F (+510°C)

Continuous: +660°F (+349°C)

Pressure, max: 2175 psi

Color: Orange with Black branding.

See reverse for technical data.

CERTIFICATIONS



API 6FB Fire Safe

TECHNICAL DATA - ULTRAPAC™ 8900

Physical Properties

TEST METHOD	TYPICAL PHYSICAL PROPERTIES	
ASTM F36	Compressibility: average, %	35
ASTM F36	Recovery: %	17
DIN 28090-2	Creep relaxation: %	21
ASTM F152	Tensile across grain: psi	1000
DIN 28090-2	Density: lbs/ft ³ (grams/cm ³)	75 (1.2)

Immersion Properties - ASTM F146 Fluid Resistance After Five Hours

	ASTM IRM #903 300°F (150°C)	ASTM FUEL B 68°F (20°C)
Thickness increase: %	2.5	1.6
Weight increase: %	29.2	24

Sealing Characteristics

	DIN 3535-6 NITROGEN
Leakage: mg/(s-m)	.05

NOTES

This is a general guide and should not be the sole means of selecting or rejecting this material. ASTM test results in accordance with ASTM F-104; properties based on nominal 2mm sheet thickness unless otherwise mentioned. When approaching maximum or minimum temperatures, or maximum operating pressure, consult A.R. Thomson Group.

AUTHORIZED DISTRIBUTOR

Limitation of liability: actual performance may vary and is determined by factors unique to a given application. It is recommended that care be taken in the selection and application of materials for hazardous services and controlled testing be undertaken to determine suitability for a specific application. A.R. Thomson Group does not make or imply any warranty of suitability for a particular purpose and is not liable for any damages arising from the use of the information in this sheet.



Locations across Canada to serve you. For your nearest branch, please visit www.arthomson.com

Copyright © A.R. Thomson Group - All rights reserved. v1.5